# **VOLANT** Adjustable Bail Extensions (VLS-1.0)

### VariLINK™ Adjustable Bail Extensions

VariLINK™ adjustable bail extensions play a key role in Volant's Light Footprint™ Tubular Running Solutions. They replace multiple sets of heavy bail extensions, facilitate a lightweight simple rig-in, and reduce stabbing uncertainty to contribute to a fast, safe, and cost effective job.

The VariLINK adjustable bail extensions are available in configurations ranging from 18" to 11' and up. They can bring the casing within 3"-6" from the bottom end of the casing running tool, improving the stabbing mechanics and facilitating a smoother transition from hoist to make-up. Rated to 25 ton, VariLINK extensions are designed for use with a single joint elevator through 5/8" shackles and are large enough to be compatible with bails up to 500 ton.

#### Tool Model: VLS-1.0 Specification Summary

Configuration Number <sup>1</sup>	API 8C Hoist Capacity <sup>2</sup>		Minimum Length		Adjustment Increment		Maximum Length		Weight (per side)		Minimum Operating Temperature	
	(ton)	(tonne)	(in)	(mm)	(in)	(mm)	(in)	(mm)	(lbs)	(kg)	(°F)	(°C)
18R	25	22	18.0	460	-	-	18.0	460	39	18	-40	-40
24R	25	22	24.0	610	-	-	24.0	610	42	19	-40	-40
30R	25	22	30.0	765	-	-	30.0	765	44	20	-40	-40
36A48	25	22	36.0	915	3.0	76	48.0	1,220	60	28	-40	-40
48A60	25	22	48.0	1,220	3.0	76	60.0	1,525	70	32	-40	-40
60A96	25	22	60.0	1,525	3.0	76	96.0	2,440	84	39	-40	-40
96A132	25	22	96.0	2,440	3.0	76	132.0	3,355	114	52	-40	-40

<sup>1.</sup> This is not a comprehensive list of all possible configurations, for additional options contact Volant sales.



<sup>2.</sup> API 8C Hoist Capacity is shown for a set (2).

<sup>\*</sup>Volant®, VariLINK™ and Light Footprint™ are trademarks of or licensed to Volant Products Inc.

## **VOLANT**: Adjustable Bail Extensions (VLS-1.0)

### **VariLINK Configurations**





Extended


1' Extension Sleeve Collapsed 48A60


3' Base Length +

Extended







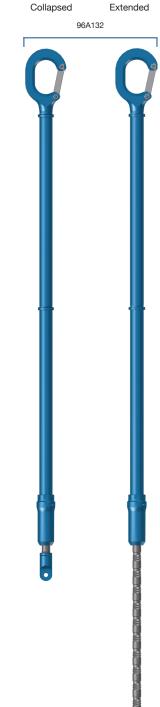

5' Base Length +

3' Extension Sleeve